

ECOWATER  
SYSTEMS®



Your Water. Perfected.

Let us

Perfect

your water and

Maximize

your peace of mind.

# ETF2300

ECOWATER SERIES – WATER FILTRATION SYSTEMS

## Proven System for Removing Iron and Treating Problem Water

### 1 Electronic Timer Controls with HydroLinkPlus® Wi-Fi and Smartphone App Monitoring

Wi-Fi enabled technology sends continuous and excessive water use, system error and service reminder alerts.

#### Water Meter

Allowing for chemical feed dosing, flow switch operation and water use information.

### 2 Full One-Inch Riser

One-inch diameter for increased flow rates, which ensures that household demand is adequately met.

### 3 Multi-Wrap Fiberglass Reinforced Media Tank

Durable fiberglass-wrapped tank liner – doesn't deteriorate, rust, or corrode.

### 4 Self-Cleaning Distributors

Distributors exhibit excellent flow rates and are cleaned automatically by counter-current water pressure.

### 5 Choose Media for Custom Applications

### 6 Washed Quartz Underbedding

Washed quartz underbedding aids in dispersion of water throughout the media tank.


### 7 Bypass Valve (optional)

Brass-free and lead-free bypass valve lets you manually bypass the system.

Fully Ported One-Inch Valve with Easy-Clamp Ring and Patented Disc.

#### Energy Efficient Power Supply

Simplifies installation, maintenance and reduces electrical hazards.

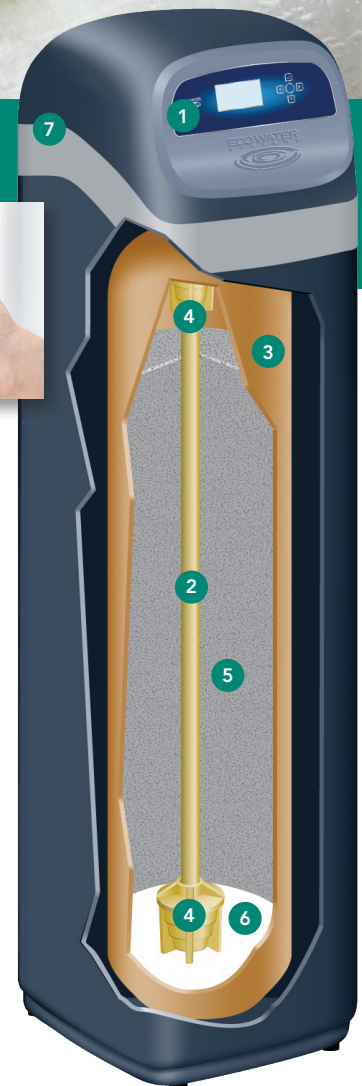


Designed, Engineered &  
Assembled in the U.S.A.

ecowaterNC.com

# ETF2300 (PF10 & PF12)

## ECOWATER SERIES WATER FILTRATION SYSTEMS

### DIMENSIONS

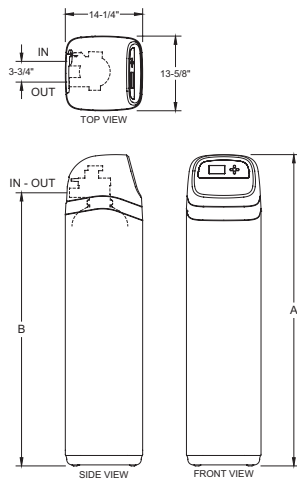

	ETF2300 PF10	ETF2300 PF12
Nominal Resin Tank Size	10" Diam. x 47"	12" Diam. x 54"
A	57"	62 1/5"
B	50"	55 3/4"

### SPECIFICATIONS

#### Multi-purpose Filters (3 media choices)

**Sediment Removal** Service Water Flow Rate (gpm)  
Type of Media: Filter Aggregate Contaminant Limits

#### ETF2300PF10

4 Based on water analysis

#### ETF2300PF12

4 – 8

**Acid Neutralizer** Service Water Flow Rate (gpm)  
Type of Media: Neutralite Lower pH Limit

8  
6.0

8  
6.0

**Taste and Odor Removal** Service Water Flow Rate (gpm)  
Type of Media: Activated Carbon Contaminant Limits

8 Based on water analysis

8

Amount Media Recommended (cu. ft.)

1 to 1 1/4

2

Amount Washed Quartz (lbs.)

17

29

Supply Water Pressure Limits (psi)

20-125

20-125

Supply Water Temperature Limits (°F/ °C)

40-120 / 4-49

40-120 / 4-49

Minimum Inlet Water Flow (gpm) – Required for backwash and fast rinse on media listed above.\*

5

7

\*Check with media manufacturer for other media requirements.

### WARRANTY

- For the lifetime of the original owner, the mineral tank will not rust, corrode, leak, burst, or in any other manner fail to perform its proper function.
- For a period of five years, the valve body will be free of defects in materials and workmanship and will perform its proper function.
- For a period of seven years, the electronic faceplate will be free of defects in materials and workmanship and will perform its normal function.
- For a period of one year, all other parts will be free of defects in materials and workmanship and will perform their normal functions.



MS2

